


Molift Duo

A Flexible Freestanding Unit

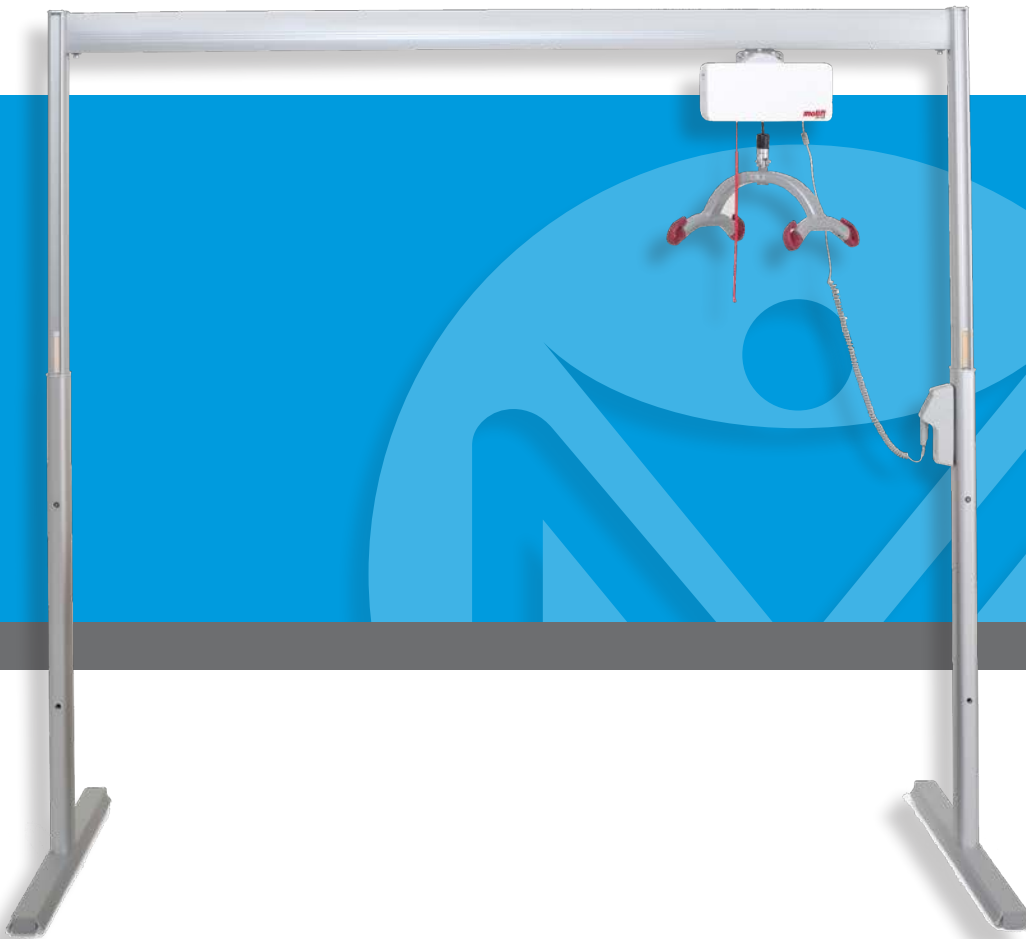


The Molift Duo has a lightweight aluminum construction and a functional design, which makes it easy to install, dismantle and move elsewhere. In combination with a Molift Air or Molift Nomad lift and a sling, Molift Duo solves most overhead lifting situations, whatever the environment. With a lifting capacity of 660 lb (300 kg), it is ideal for lifting and transferring a person from/to a bed, floor, chair, wheelchair, toilet, etc.

Due to a two-post freestanding system with a rail length from 78 in (2 m) up to 138.8 in (3.5 m) and a four-step adjustable height up to 100.4 in (2.55 m), the freestanding unit is suitable for all beds and room sizes.



Molift Service Tool

The Molift Service Tool is a unique software package which can be connected to all Molift motorized products enabling qualified service personnel the ability to read, verify and analyze the key parameters in the lift. This makes it an effective tool for reading the service history and ensuring that the lift is working properly.

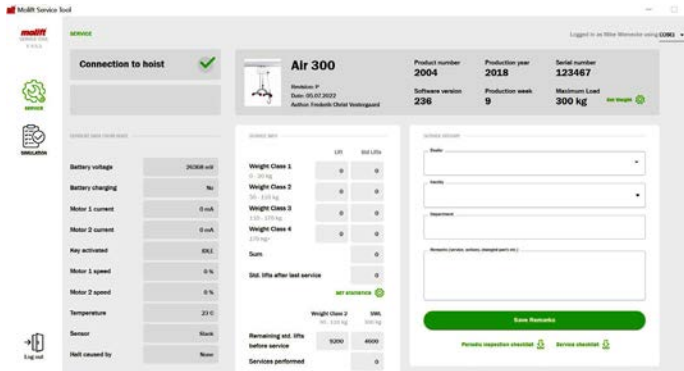

- Allows clinicians to assess product utilization by frequency and patient weight class
- Weight class settings can be customized to meet the needs of the facility
- Allows for recording of product placement date, placement location, and service intervals
- Allows Biomedical Engineering to assess general equipment condition during normal preventive maintenance and diagnose problems as needed

The Molift Duo is Perfectly Suited for MedCo Slings



Single Patient Seated
SHB-1PS-(S,M,L,XL)



Advantage Seated
SHB-ADV-(S,M,L,XL)



Ambulation Shorts
AS-APEX
XS,S,M,L,XL,2XL,3XL
BARI80, BARI120



APEX Repositioning
REP-APEX-STD

Molift Duo Specifications

Safe Working Load (SWL)	660 lb (300 kg)
Depth	47.2 in (1.2 m)
Height	Adjustable from 88.6 in (2.25 m) to 100.4 in (2.55 m)
Length	Available in 78 in (2 m), 98.4 in (2.5 m), 118 in (3 m), 138.8 (3.5 m)

